

imageRUNNER
ADVANCE
C3530 / C3525 / C3520

Canon
Delighting You Always

Vivid and Vibrant Colour output with intuitive usability and powerful end-to-end document capability

The imageRUNNER ADVANCE C3500 series is small in size but big in its ambition to solve your challenges around managing your documents. It is the perfect addition to support and optimise any busy working groups day-to-day workflows.

Workflow Efficiency

- Intuitive user interface with a large, colour touchscreen provides users with smartphone-like usability, making navigation a breeze.
- Single-Pass document feeder option allows effortless, rapid scanning with features like multi-sheet feed detection and skip blank originals.
- Advanced Personalisation enables a unique, personal experience tailored to meet each user's workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronised across multiple devices for consistency.
- Canon's MEAP platform provides process optimisation, by integrating with a range of powerful document, capture and output management solutions.
- Scalable support for mobile where users can connect directly to the device with Direct Access Point. Capture, scan or print documents easily with the Canon Print Business app.
- Intelligent Recovery wakes device from sleep mode when user is approaching device via motion sensor technology.
- Various finishing functions such as Staple-on-Demand, ECO-Staple, saddle stitch, double/corner stapling and foldings are available as an option.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user helps reduce unnecessary printing, resulting in lower total document cost.
- Tight integration with output management solutions, such as uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis.
- Quality and reliability, combined with remote diagnostics and assistance, can help reduce costs by minimising downtime and time spent by IT resolving issues.
- Consistent user operation combined with remote and centralised fleet management can help simplify IT management of devices and entire fleets.
- Save on fax transmission costs by utilising the IP Fax option.



Security

- Control who has access to the device with Picture Login authentication.
- Prevent unauthorised distribution of sensitive information with an array of standard and optional document security features.
- Ensure information privacy and security across your network with IPsec, port filtering capabilities, and SSL technology.
- Secure Print and Mailbox Simple enhance document confidentiality.



Device and Fleet Management Efficiency

- Synchronise personalised user settings across multiple devices through Advanced Personalisation Sync.
- Canon's device management tools give you a centralised point of control across your entire fleet, upgrade devices remotely, check device and consumables status and capture meter readings.
- Optional PCL and Adobe PostScript print driver allows seamless integration with enterprise applications.
- Remote diagnostics allow timely, accurate and effective resolution.


Reliability

- V² (Vivid & Vibrant) imaging technology ensures high quality printouts that impress time after time.
- Supreme transferability of toner and stable reproduction of colours onto a wide range of media, even at large volumes.
- State-of-the-art imaging technologies and toner allow for consistently striking images with real 1,200 dpi. print resolution.
- Designed to achieve maximum uptime with intuitive user walkthrough videos and status notifications, to help keep supplies replenished.
- Robust design and engine, with up to 2,300 sheet paper capacity, perfect for handling workloads of busy workgroups.

Sustainability

- The pQ toner features low-heat on-demand fusing resulting in faster prints, lower power use and a greener environment.
- Minimise waste by holding jobs at the device with Force Hold Print. Choose to preview your print jobs or even change print settings at the device to achieve the desired results at the first time of printing.
- Incorporates sustainable design, with the use of recycled materials and bio-based plastic, and a focus on minimising environmental impact.
- Consumes as little as 0.8W in sleep mode.

Main Configuration Options

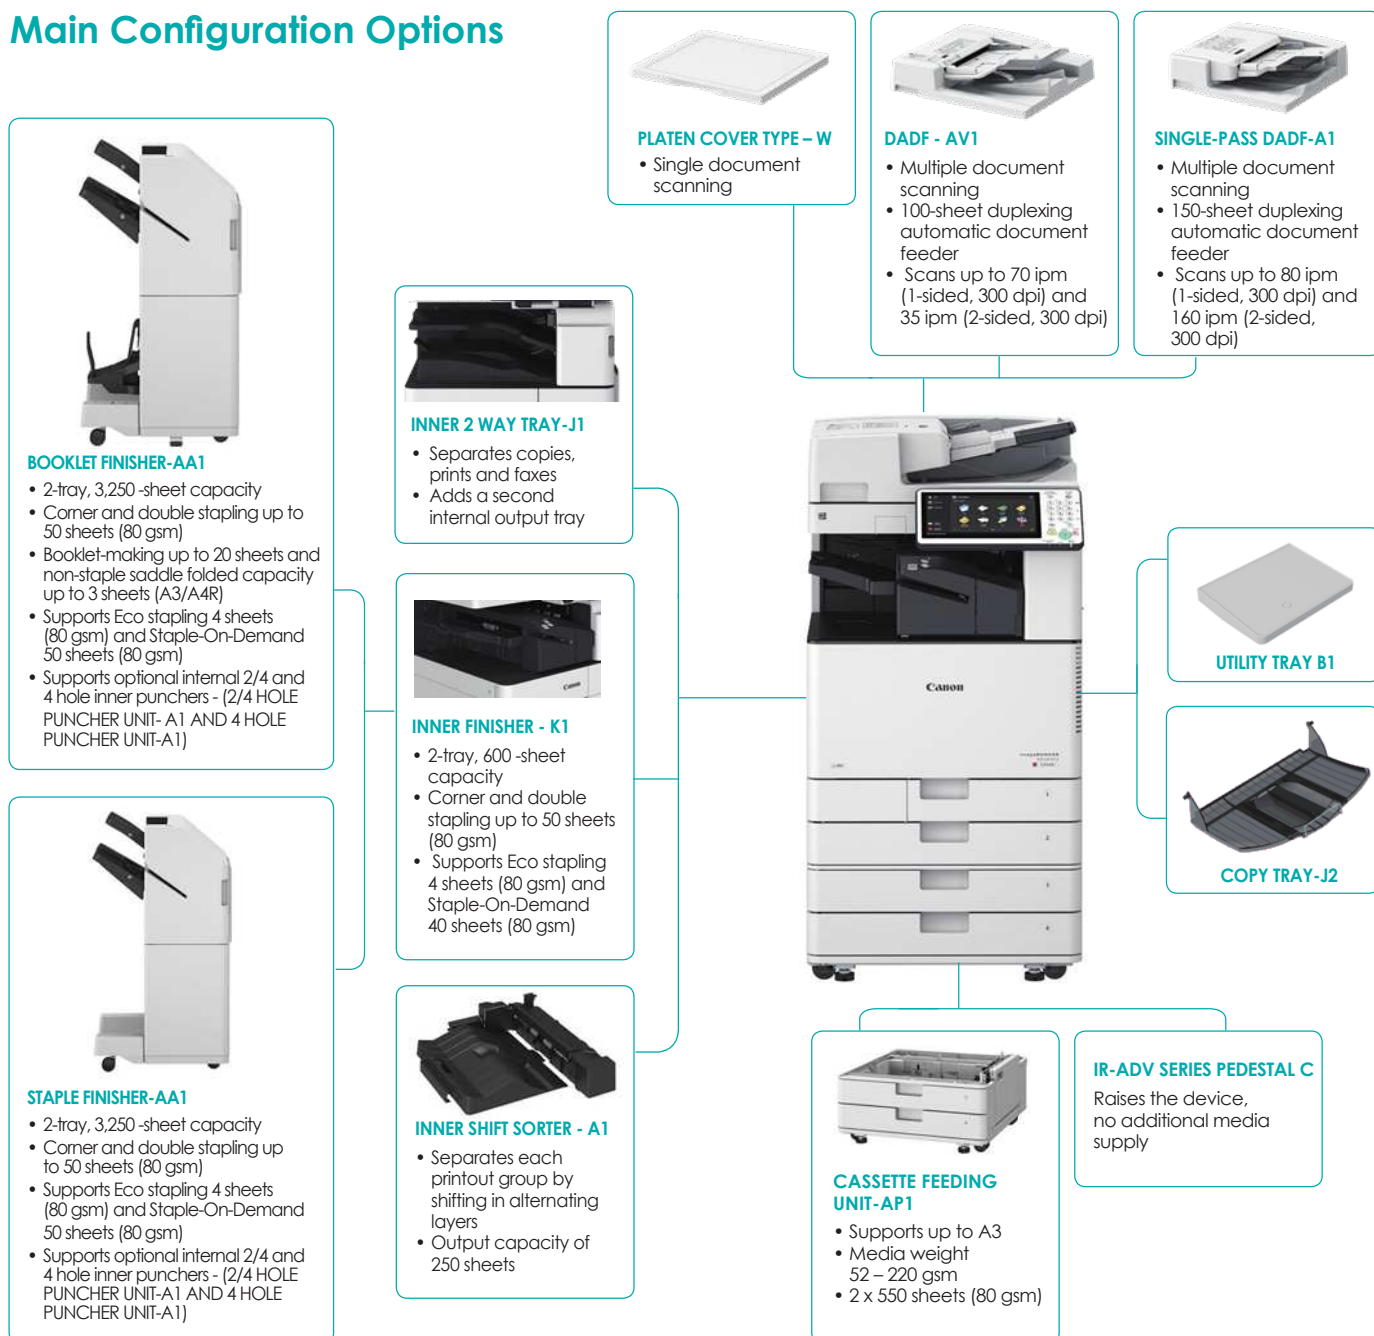

MAIN UNIT

Type

Colour Laser Multifunctional

Core Function

Print, Copy, Scan, Send, Store and Optional Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

Standard : 10.1 inch TFT LCD WSVGA Colour Touch Panel

Memory

Standard : 3.0GB RAM

Hard Disk Drive

Standard : 250GB

Maximum: 1TB

Interface Connection

Network Standard: 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)

Optional : NFC, Bluetooth

Others Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host),
USB 2.0 x1 (Device)

Optional : Serial Interface, Copy Control
Interface

Paper Capacity (A4, 80gsm)

Standard : 1,200 Sheets

Maximum: 2,300 Sheets

Paper Sources (A4, 80gsm)

Standard : Two 550-sheet Paper Cassettes
100-sheet Multi-purpose tray

Optional : **CASSETTE FEEDING UNIT-AP1:**
Two 550-sheet Paper Cassettes

Maximum: 2,300 Sheets

Paper Output Capacity (A4, 80gsm)

Standard : 250 Sheets

Maximum: 3,450 Sheets

(with EXTERNAL FINISHER and COPY TRAY-J2)

Finishing Capabilities

Standard : Collate, Group

With Inner Finisher option: Offset, Collate, Group, Staple,
ECO-Staple, Staple-On Demand

With External Finisher option: Offset, Collate, Group, Staple,
Hole Punch*, Saddle Stitch**, ECO-Staple,
Staple-On Demand

*Requires 2/3H or 2/F4H Hole Puncher Unit-A1 option

**Requires Booklet Finisher-AA1 option

Supported Media Types

Cassettes (1/2):

Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Bond paper, Envelope

Multi-Purpose Tray:

Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Tracing paper, Label, Bond paper, Envelope

Cassette Feeding Unit-AP1 (3/4):

Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Bond paper

*Use only A4 transparencies made especially for multi-functional device

Supported Media Sizes

Cassette 1:

Standard size : A4, B5, A5R

Envelopes : No.10 (COM10), ISO-C5, DL

Custom Size : 139.7 x 182 mm up to 297 x 215.9 mm

Cassette 2:

Standard size : A3, B4, A4, A4R, B5, A5R, Foolscap,
India Legal, F4A, Envelopes
(No. 10[COM 10], Monarch, ISO-C5, DL)

Custom Size : 139.7 x 182 mm up to 304.8 x 457.2 mm

Cassette Feeding Unit-AP1 (3/4):

Standard size : A3, B4, A4, A4R, B5, A5R

Custom Size : 139.7 x 182 mm up to 304.8 x 457.2 mm

Multi-Purpose Tray:

Standard size : A3, B4, A4, A4R, B5, B5R, A5R, Foolscap,
India Legal, F4A, Envelopes
(No. 10[COM 10], Monarch, ISO-C5, DL)

Custom Size : 98.4 x 139.7 mm to 320 x 457.2 mm

Free size : 98.4 x 139.7 mm to 320 x 457.2 mm

Envelope custom size: 98 x 98 mm to 320 mm x 457.2 mm

Supported Media Weights

CASSETTES : 52 to 220 gsm

MULTI-PURPOSE TRAY : 52 to 300 gsm

DUPLEX : 52 to 220 gsm

Warm-up Time

From Power On* : 34 Seconds or Less

* Time between device power-on and when the start key is enabled (Force
Hold print)

From Deep Sleep Mode : 10 Seconds or Less

Quick Startup Mode : 4 seconds or less**

** If <Quick Startup Settings for Main Power> is set to "On", it takes 4 seconds until
the key operation on the touch panel display is available after turning on the
main power of the machine. Depending on the situations, the machine does not
start quickly.

Dimensions (W x D x H)

With SINGLE PASS DADF-A1: 565 x 742 x 900 mm

With DADF-AV1: 565 x 736 x 880 mm

Installation Space (W x D)

Basic : 978 x 1,123 mm (attached with Multi-
Purpose Tray open + Cassette Drawers
open)

Fully : 1,620 x 1,123 mm (attached with

Configured : BOOKLET FINISHER-AA1 + Multi-Purpose
Tray extension extended)

Weight including the toner bottle

Approx. 68kg

Approx. 81.5kg (with SINGLE PASS DADF-A1)

Approx. 76.2kg (with DADF-AV1)

Print Specifications

Printing Method

Colour laser beam printing

Print Speed

iR-ADV C3530 30/30 ppm (A4) 15/15 ppm (A3)

iR-ADV C3525 25/25 ppm (A4) 15/15 ppm (A3)

iR-ADV C3520 20/20 ppm (A4) 15/15 ppm (A3)

Print Resolution

Up to 1,200 dpi x 1,200 dpi

Page Description Languages

UFR II (Standard), PCL6 (Optional), Adobe PS 3 (Option)

Double Sided Printing

Automatic (Standard)

Direct Print

Direct printing available from USB memory key,

Advanced box, Remote UI and Web Access*

Supported File Types: PDF, TIFF, JPEG, XPS

*Only PDF print from websites is supported.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T* (Japanese, Korean,
Simplified and Traditional Chinese),
Barcode fonts**

*Requires optional PCL INTERNATIONAL FONT SET-A1

**Requires optional BARCODE PRINTING KIT-D1

PS fonts: 136 Roman

Operating System

UFR II: Windows Vista/Server 2008/Windows 7/Server 2008
R2/ Windows 8/Server 2012/Windows 8.1/Server 2012
R2/ Windows 10/Server 2016, MAC OS X (10.7 or later)

PCL: Windows Vista/Server 2008/Windows 7/Server 2008
R2/ Windows 8/Server 2012/Windows 8.1/Server
2012 R2/ Windows 10/Server 2016

PS: Windows Vista/Server 2008/Windows 7/Server 2008
R2/ Windows 8/Server 2012/Windows 8.1/Server 2012
R2/ Windows 10/Server 2016

PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later),
Windows Vista/Windows 7/Windows 8/Windows8.1/
Windows 10

Copy Specifications

Copy Speed (BW/Colour)

iR-ADV C3530 30/30 ppm (A4) 15/15 ppm (A3)

iR-ADV C3525 25/25 ppm (A4) 15/15 ppm (A3)

iR-ADV C3520 20/20 ppm (A4) 15/15 ppm (A3)

*First-Copy-Out Time (BW/CL)

* 20 °C to 30 °C Environment

Approx. 5.9/8.2 seconds or less

Copy Resolution

Reading : 600 dpi x 600 dpi

Printing : Up to 2400dpi equivalent x 600dpi

Multiple Copies

Up to 999 copies

Copy Exposure

Automatic or Manual (11 Levels)

Magnification

25% - 400% (1% Increments)

Preset Reductions

25%, 50%, 61%, 70%, 81%, 86%

Preset Enlargements

115%, 122%, 141%, 200%, 400%

Scan Specifications

Type

Single-pass Duplexing Automatic Document Feeder or

Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

SINGLE PASS (SP) DADF-A1: 150 Sheets (80 gsm)

DADF-AV1: 100 Sheets (80 gsm)

Document Feeder Supported Media Sizes

SP DADF-A1: A3, B4, A4, A4R, B5, B5R, A5, A5R, B6R

DADF-AV1: A3, B4, A4, A4R, B5, B5R, A5, A5R, B6

Document Feeder Supported Media Weights

SINGLE PASS DADF-A1

Single-sided scanning: 38 to 157 gsm (BW)

64 to 157 gsm (CL)

Double-sided scanning: 50 to 157 gsm (BW)

64 to 157 gsm (CL)

DADF-AV1

Single-sided scanning: 38 to 128 gsm (BW)

64 to 128 gsm (CL)

Double-sided scanning: 50 to 128 gsm (BW)

64 to 128 gsm (CL)

Pull Scan Spec

Color Network ScanGear2. For both Twain and WIA

Supported OS: Windows Vista/7/8/8.1/10 Server 2008/

Server 2008 R2/Server 2012/Server 2012 R2

Scan Resolution

100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi,

200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi

Platen Acceptable Originals

Platen: Sheet, Book, 3-Dimensional Objects [Up to 2kg]

Paper Size: A3, B4, A4R, A4, B5R, B5, A5R, A5, B6

Scan Speed (A4)

SP DADF-A1:

1-sided Scanning (BW): 80 ipm (300dpi)/51 ipm (600 dpi)

1-sided Scanning (Colour): 80 ipm (300dpi)/51 ipm (600 dpi)

2-sided Scanning (BW): 160 ipm (300dpi)/51 ipm (600 dpi)

2-sided Scanning (Colour): 160 ipm (300dpi)/51 ipm (600 dpi)

DADF-AV1:

1-sided Scanning (BW): 70 ipm (300dpi) / 51 ipm (600 dpi)

1-sided Scanning (Colour): 70 ipm (300dpi) / 51 ipm (600 dpi)

2-sided Scanning (BW): 35 ipm (300dpi) / 25.5 ipm (600 dpi)

2-sided Scanning (Colour): 35 ipm (300dpi) / 25.5 ipm (600 dpi)

Double sided scanning

2-sided to 2-sided (Automatic)

Send Specifications

Optional/ standard

Standard on all models

Destination

E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box
Simple, Super G3 FAX(Optional), IP Fax(Optional)

Colour Mode

Automatic-Colour Select (Full Colour/Grayscale),
Automatic-Colour Select(Full Colour/Black-and-White),
Full colour, Grayscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/One-touch (200)

Send Resolution

100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi,

200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi

Communication Protocol

File : FTP, SMB 3.0, WebDAV

E-mail/I-Fax : SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard : JPEG, TIFF, PDF/XPS (Compact),
PDF (PDF/A-1b, Optimize for Web, Apply Policy)

Optional : PDF (Trace&Smooth, Encrypted), PDF/XPS
(Digital Signature, Searchable),
Office Open XML (Powerpoint, Word)

Fax Specifications

Optional/ Standard

Optional on all models

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 kbps

G3 : 14.4 kbps

Compression Method

MH, MR, MMR, JBIG

Resolution

400 x 400 dpi, 200 x 400 dpi,

200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

A5* and A5R* to A3

* Sent as A4

FAX Memory

Up to 30,000 pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 dials

Sequential Broadcast

Max. 256 addresses

Memory Backup

Yes

Store Specifications

Mail Box Simple (Number supported)

100 User Inboxes, 1 Memory RX Inbox,

50 Confidential Fax Inboxes

30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV

Supported Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.): SMB: 64, WebDAV: 3
(Active Sessions)

Advanced Box Available Disc Space
Approx. 16GB (Standard HDD)
Approx. 480GB (1TB HDD)

Memory Media
Standard: USB Memory

Security Specifications

Authentication

Standard : Picture Login Authentication,
User Authentication, Department ID
Authentication, (Device and Function
Level Login), Access Management System

Optional: My Print Anywhere secure print
(Requires uniFLOW)

Data

Standard: Trusted Platform Module (TPM), Hard Disk
Password Lock, Hard Disk Drive Erase, Hard
Disk Drive Encryption (FIPS140-2 Validated),
Mail Box Password Protection

Optional : Hard Disk Drive Mirroring, Hard Disk Drive
removal, IEEE 2600.2 Common Criteria
Certification.

Network

Standard : IP/Mac Address Filtering, IPSEC, TLS Encrypted
Communication, SNMP V3.0, IEEE 802.1X, IPv6,
SMTP Authentication, POP Authentication
before SMTP

Document

Standard : Secure Print, Force Hold Print

Optional : Encrypted PDF, Encrypted Secure Print,
User and Device Signatures, Secure
Watermarks, Document Scan Lock

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (no condensation)

Power Requirements

220-240V (±10 %), 50/60Hz (±2 Hz), 4.0A

Power Consumption

Maximum: 1.5 kW
Standby: Approx. 41.2 W*
Sleep mode: Approx. 0.8 W**

*Reference Value

**0.9W sleep mode is not available in all circumstances due to certain settings.

Paper Supply Options

PAPER SUPPLYING UNIT

Cassette Feeding Unit-AP1

Paper Size : A3, B4, A4, A4R, B5R, B5, A5R
Custom size : 139.7 mm x 182.0 mm to
304.8 x 457.2 mm
Paper Weight : 52 to 220 gsm
Paper Capacity : 550 sheets x 2 (80 gsm)
Power Source : From the Main Unit
Dimensions (WxDxH) : 565 x 615 x 248 mm**
Weight : Approx. 16 kg

**When attached with the Main Unit

Output Options

INNER TRAY OUTPUT

INNER 2WAY TRAY-J1

Number of Trays* : 2
Upper Tray Capacity : 100 sheets
Lower Tray Capacity : 250 sheets
Paper Weight : 52 to 300 gsm

Paper Size Standard size: A3, B4, A4, A4R, B5, B5R, A5R,
Envelope (No.10 (COM10),
Monarch, DL, ISO-C5),
Custom Size: 98 x 148 mm to 297 x 431.8mm
Dimensions* (W x D x H) : 427 x 407 x 76 mm
Weight : Approx. 0.6 kg

*When attached with the Main Unit

INNER SHIFT SORTER-A1

Number of Trays : 1
Total Output Capacity : 250 sheets - A4/B5
125 sheets - A3/B4/A4R/A5/
A5R/B5R

Paper Weight : 52 to 300 gsm
Dimensions* (W x D x H) : 538 mm x 523 mm x 114 mm
Weight : Approx. 3.0 kg

*When attached with the Main Unit

INNER FINISHER

INNER FINISHER-K1 (Internal)

Number of Trays : 2
Tray A Upper Capacity : 100 sheets - A4, B5, A5, A5R
50 sheets - A3, B4, A4R, B5R, SRA3
Tray B Lower Capacity : 500 sheets - A4, B5, A5, A5R
250 sheets - A3, B4, A4R, B5R, SRA3
Paper Weight : 52 to 300 g/m²
Staple Position : Corner, Double
Staple Capacity : CORNER AND DOUBLE STAPLING
A4/B5: 50 sheets (52 to 90 gsm)
A3/B4/A4R: 30 sheets (52 to 90 gsm)
ECO STAPLE: A3/A4/B4/B5
5 sheets (52 to 64 gsm)
4 sheets (65 to 81.4 gsm)
3 sheets (81.5 to 105 gsm)

Staple-On Demand : 40 sheets (80 gsm)
Power Source : From the Main Unit
Dimensions** (W x D x H) : 604 mm x 525 mm x 188 mm
Weight : Approx. 8 kg

**When the extension tray is extended

STAPLE FINISHER

STAPLE FINISHER-AA1 (External)

Number of Trays : 2
Tray A Upper Capacity : 250 sheets - A4, B5, A5, A5R
125 sheets - A3, B4, A4R, B5R
Tray B Lower Capacity : 3,000 sheets - A4, B5, A5R, A4, B5, A5R
1,500 sheets - A3, B4, B5R, A4R
Paper Weight : Upper Tray - 52 to 256 gsm
Lower Tray - 52 to 300 gsm
Staple Position : Corner, Double
Staple Capacity : CORNER AND DOUBLE STAPLING
A4/B5: 50 sheets (52 to 90 gsm)
A3/B4/A4R: 30 sheets (52 to 90 gsm)
ECO Staple: A3/A4
5 sheets (52 to 64 gsm)
4 sheets (65 to 81.4 gsm)
3 sheets (81.5 to 105 gsm)

Staple-On Demand : 50 sheets (90 gsm)
Dimensions** (W x D x H) : 637 mm x 623 mm x 1,016 mm
Weight : Approx. 30 kg

**When the extension tray is extended

BOOKLET FINISHER

BOOKLET FINISHER-AA1 (External)

Number of Trays : 2
Tray A (Upper) Capacity: 250 sheets - A4, B5, A5, A5R
125 sheets - A3, B4, A4R, B5R, SRA3
Tray B (Lower) Capacity : 3,000 sheets - A4, B5, A5, A5R
1,500 sheets - A3, B4, A4R, B5R, SRA3
Paper Weight : Upper Tray - 52 to 256 gsm
Lower Tray - 52 to 300 gsm
Staple Position : Corner, Double
Staple Capacity : CORNER AND DOUBLE STAPLING
A4/B5: 50 sheets (52 to 90 gsm)
A3, B4, A4R: 30 sheets (52 to 90 gsm)
ECO Staple: A3/A4
5 sheets (52 to 64 gsm)
4 sheets (65 to 81.4 gsm)
3 sheets (81.5 to 105 gsm)

Staple-On Demand : 50 sheets (90 gsm)
Booklet Stitch paper size : A3, B4, A4R, Custom Size
(195.0 x 270 to 304.8 x 457.2 mm)

Booklet Stitch Staple Capacity (80 gsm):
20 sheets x 10 sets (including 1 cover sheet up to 256 gsm)
Dimensions** (W x D x H) : 637 x 623 x 1,016 mm
Weight : Approx. 53 kg

**When the extension tray is extended

PUNCHER UNIT/S

2/3 HOLE PUNCHER UNIT-A1*: Two or Three Holes
Acceptable Punch Paper Weight: 52 to 300 gsm
Acceptable Punch Paper Size:
Two holes A3, B4R, A4, A4R, B5, B5R
Three holes A3, B4R, A4, B5
Power Source: From the Main Unit

*Requires either STAPLE FINISHER-AA1 or BOOKLET FINISHER-AA1

2/4 HOLE PUNCHER UNIT-A1: Two or Four Holes
Acceptable Punch Paper Weight: 52 to 300 gsm
Acceptable Punch Paper Size:
Two holes A3, B4, A4, A4R, B5, B5R
Four holes A3, A4
Power Source: From the Main Unit

* Requires either STAPLE FINISHER-AA1 or BOOKLET FINISHER-AA1

Software and Printer Management

Remote management tools

eMaintenance: Compatible with eMaintenance
services via embedded RDS
(Enables meter capture, automatic
consumables management,
remote diagnostics and reporting for
service providers to offer efficient, fast
and proactive maintenance)

Content Delivery System: Allows the Remote distribution of
firmware, iR options and MEAP
applications; Remote User Interface
(RUI) Web-based interface to each
device that helps to provide remote
device management and control.

iW Management Console: Server-based software for centralised
management of a fleet of devices
(includes monitoring or consumables,
status monitoring and alerts, distribution
of address books, configuration
settings, firmware and MEAP
applications, meter capture and
reporting, driver and resource
management)

Scanning software

Network ScanGear: TWAIN-compliant scanner driver that
enables computers on a network to
use the pull scan functionality of the
device.

Platform

MEAP (Multifunctional Embedded Application Platform):
A powerful JAVA Embedded Platform for Canon devices
which provides tight coupling between a range of
software solutions and the device.

Document Publishing

iW DESKTOP: Powerful print publishing software which
easily combines documents from
different sources and file formats,
applies finishing with preview and
templates to create professional looking
documents. Includes PDF creation,
annotation and compression
capabilities for simple digital workflows
such as proofing and authorization.

For full information on options available for the iR-ADV
3500 series, please refer to the specification tables on
your local Canon web site.

To arrange for a demonstration, simply contact any of our offices below.

Canon India Pvt. Ltd.

7th Floor, Tower B, Building # 5, DLF Epitome, DLF Phase III, Gurgaon, Haryana - 122002 | Ph : 91-124 - 4160000



Partner / Dealer Stamp

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document.

Canon, imageRUNNER, imageRUNNER ADVANCE, imageCHIP, RAPID Fusing System, MEAP, eMaintenance, iW, Business can be simple and get Smart get genuine are trademarks of Canon Inc. and/or its affiliates. "MEAP" is a trademark of CANON Inc., referring to an "application platform" for Canon multifunction and single function printers. Other names may be the trademarks of their respective owners. uniFLOW, eCopy and Therefore are independent party software distributed by Canon Singapore Pte Ltd.

Adobe, PostScript, PostScript 3 and the PostScript logo are trademarks of Adobe Systems Incorporated

0206W042 © 2017 Canon Singapore Pte. Ltd.
All rights reserved.